

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/520451



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005129 A1

(51) International Patent Classification⁷: B63B 35/44

(21) International Application Number:
PCT/FI2002/000617

(22) International Filing Date: 8 July 2002 (08.07.2002)

(25) Filing Language: Finnish

(26) Publication Language: English

(71) Applicants and

(72) Inventors: TÖRMÄLÄ, Pasi [FI/FI]; PL 32, FIN-10301
Karjaa (FI). PITKÄNEN, Ilkka [FI/FI]; PL 36, FIN-02771
Espoo (FI).

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(74) Agent: KANGASMÄKI, Reijo; Finnish Patent Consult-
ing FPC, Hermiankatu 14, FIN-33720 Tampere (FI).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

(54) Title: METHOD FOR USE OF A MARITIME UNIT AND A MARITIME UNIT

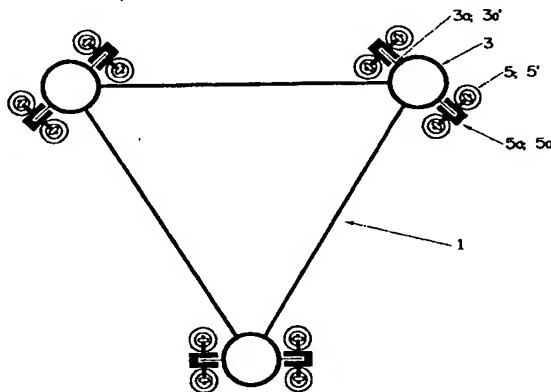

(57) Abstract: The invention relates to a method for operating a maritime unit (1), said maritime unit comprising a frame structure (2), which is provided with at least power production and/or drive assemblies for the maritime unit, and at least three legs (3) operated by a jack mechanism (5), on the one hand for steadying the maritime unit (1) on the seabed by driving the legs (3) from a standby position, as required by the maritime unit's shipping condition, downwards in a direction substantially vertical with respect to the frame structure (2) and, on the other hand, for releasing the same from the seabed by driving the legs (3) upward relative to the frame structure. The maritime unit (1) has at least its legs (3) upward relative to the frame structure. The maritime unit (1) has at least its legs (3) operated on a so-called disk brake principle for enabling a substantially stepless drive therefor, particularly regarding the manipulation and locking thereof, whereby the maritime unit has each of its legs (3) provided with a brake disk system (3a), such as one or more brake flanges (3a') or the like, extending longitudinally of the leg and, on the other hand, the maritime unit has its frame structure (2) provided with a brake system (5a), such as one or more brake shoe elements (5a') or the like, operable in a vertical direction by means of a jack mechanism (5). The invention relates also to a maritime unit operating in accordance with the method.

WO 2004/005129 A1